



SkyBlade

FAN COMPANY

WHERE FORM FOLLOWS FUNCTION

UltraLite Controller

KEY FEATURES

- Easily mounted to wall.
- Control each fan individually.
- Operate your fans for cooling and destratification.
- Manually control each fan's forward speed.




TECHNICAL SPECIFICATIONS


Potentiometer	0-10V DC analog 1000 ohm resistance 0.5W power consumption IP44-54 protection.
Connections	5-core shielded wire, field supplied.
Enclosure	IP 44(Inset)/IP54 (Surface) ABS plastic Dimensions: 3"L x 3.25"W x 3"H

WIRING DIAGRAM


230V 1/3 PH and 480V 3 PH

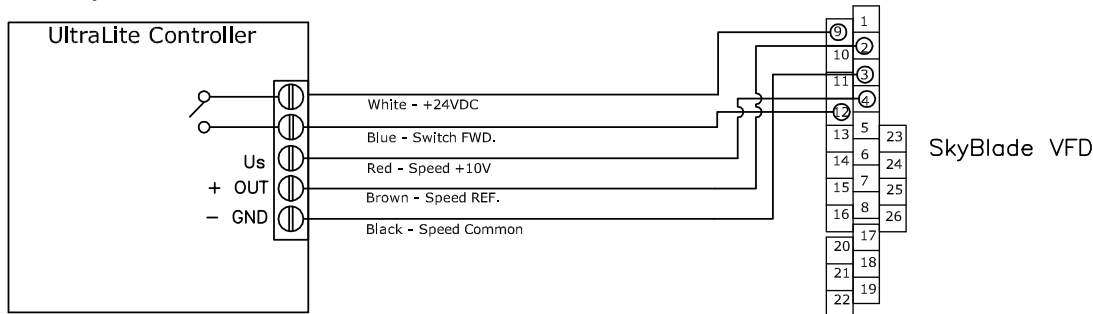

120V 1 PH and 575V 3 PH

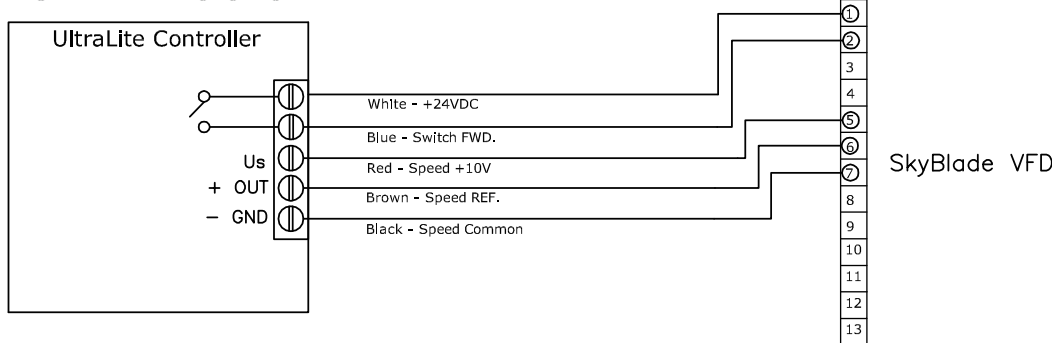

ULTRALITE PACKAGE CONTENTS



A. UltraLite Controller
(x1)

ULTRALITE ASSEMBLY

